


P2.9

OUTDOOR FINE PITCH LED SCREENS FOR
DIGITAL OUT-OF-HOME MESSAGING &
PROFESSIONAL INSTALLATIONS



- New generation full-flip chip microLED technology
- Adjustable brightness optionally up to 6.500 nits
- Production level calibration for best color uniformity
- Aluminum fanless design for high performance under extreme conditions
- Lightweight for easy adaptation and low cost framework design
- Lower power consumption with common-cathode technology

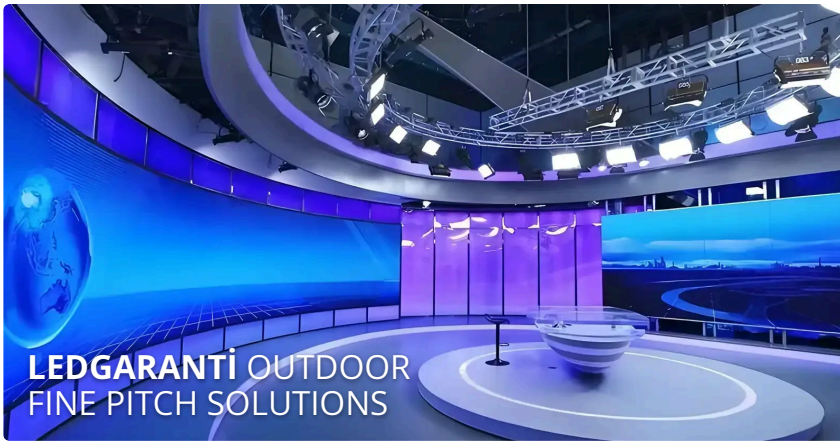

LEDGARANTI OUTDOOR
FINE PITCH SOLUTIONS

- 1- Panel dimensions can change upon customer request
- 2- That value is the remain capacity of PSU's at 100% brightness and white color content
- 3- Different types of video input available as option

IDEAL FOR

- DOOH Advertising
- Shopping Malls
- Stadiums
- Corporate Buildings
- Transport Hubs
- Control Rooms

ADVANCED FEATURES

- Front Access
- Lightweight
- Slim
- Temp Monitoring
- Smoke Monitoring
- Voltage Monitoring
- Remote Control
- Easy To Install
- Wide Angle
- High Refresh Rate
- Transparent
- Noiseless
- Calibration
- Pixel Detection
- Fanless

TECHNICAL SPECIFICATIONS

GENERAL

Chipset	: ICND1065L -ICN2153S Chipone
Operating environment	: outdoor
Pixel pitch	: 2.9mm
Service type	: front and rear access
Calibrated brightness (nits)	: 5.000 nits
Lamp type	: SMD
Lifespan (hours at %50 brightness)	: >100.000 hours
White color calibration (adj.)	: 3.500K-8.500K
Gray scale	: >16 bits
Brightness control	: 256 level

MODULE SPECIFICATIONS

Module dimensions (mm)	: 250x250
Refresh frequency	: 2.880Hz - 3.840Hz
Module resolution	: 84x84px
LED drive method	: dynamic
Module material	: aluminum
Module type	: sealed
PCB type	: multilayer
Surface coating	: UV resistant & high contrast

PANEL SPECIFICATIONS

Panel material	: aluminum
Panel paint	: ES powder coated
Panel dimensions (mm)	: 500x1.000
Panel depth	: 86mm
IP level	: IP67 front, IP65 rear
Panel weight	: <16 kg
Panel resolution	: 168x336px
Pixel density (pcs/sqm)	: 112.896
Viewing angle (horizontal x vertical)	: >160° x 140°
Minimum viewing distance	: >3m
Operating temperature range	: -20°C ~ +60°C
Storage temperature range	: -25°C ~ +60°C
Operating humidity	: 10% ~ 90% non-condensing
Power input voltage	: 110 ~ 240 VAC
Power input frequency	: 50-60Hz
Average power per sqm	: <140W
Max power per sqm	: <650W
Active PFC	: YES
Load tolerance	: 25% min.
Panel installation type	: Fixed installation
Cooling	: Passive cooling without fan

OTHER

Max input resolution	: FHD, UHD, 4K, 8K
Standard video sources	: All digital formats
Brightness adjustment	: Automatic & manual
Death pixel monitoring	: Optional
Module monitoring	: YES
Temperature monitoring	: YES
Smoke monitoring	: Optional
Voltage monitoring	: YES
Power redundancy	: N/A
Signal path backup	: YES
Signal transmission	: CAT or Fiber Optic
Standby scheduling	: YES
Power on/off scheduling	: Optional
Power saving mode	: YES
Certification	: CE-EMC, CE-LVD, RoHS, FCC

OPTIONS

Contrast ratio	: 10.000:1
Higher Brightness - CLX	: 6.500 nits
Corner installation	: 90-degree / curved



LedGaranti reserves the right to change any product specification, discontinue of any product or services without prior notice. The icons above indicate optional features.

www.ledgaranti.com.tr