

TECHNICAL SPECIFICATIONS

LED Lamp

Type	SMD2121
Brand	Nationstar
Arrangement	1R1G1B
Chip parameters	Red (620-625nm) IV:(250-300mcd)
Chip parameters	Green (520-525nm) IV:(450-550mcd)
Chip parameters	Blue (470-475nm) IV:(100-120mcd)

LED Module


Pixel Pitch	4mm
Module Size	256x128mm
Module Resolution	64x64=4096(Dots)
Module Weight	0.3kg

LED Cabinet

Pixel Density	62500 Dots/sqm
Module Quanty /Cabinet	2x3=6(Pcs)
Cabinets Material	Nanomaterial
Cabinet Weight	5kg
Cabinet Dimension(W*H*D)	512x512x70mm
Cabinet Resolution	128x128=16384 Dots
Brightness	>800 cd/sqm
Viewing Angle	140(Horizontal),140(Vertical)
Nearest Viewing Distance	7m
Power Consumption (Max)	1000 w/sqm
Power Consumption (Average)	300 w/sqm
Refresh Rate	>1800Hz
Drive Mode/Driver Position	Constant driving 1/16 Scan,Combined diver board
Display Function	Text,Graphics,Video
Frame Frequency	no less than 60 frame/sec
Input Voltage	AC110-220V±10%,50/60Hz
Output Voltage	DC-5V,40A/60A/80A
Grey Scale Levels	16bit
Color Processing	R(1024)xG(1024)xB(1024)
Brightness Adjustment	256 color levels,can be adjusted manually and automatically optional
MTBF(mean time between failures)	5000 hours
Life-span	100,000 hours
Protection Level	IP43/IP54
Malfunction Dot Rate	less than 0.0001
Working Temperature	-20°C~50°C
Humidity	15%~85%

Control System

Control Mode	Synchronization/Asynchronization
Control System	Sending Card,Receiving Card,Receiving HUB
Software	LED Studio (HSTV-linsn)
Language	Chinese, Traditional Chinese, English, French, Japanese, Russian, Thai, Spanish, Polish, Italian, Portuguese, Turkish, Dutch, Greek, Bulgarian, Romanian, Arabic,Korean,German
Input Signal	AVI/MPG/MPEG/TXT.etc
PC Operating System	Microsoft Windows 10,XP and Windows 7
Control Card Input	DVI,USB,RJ45,HDMI(Sold separately)
Communication Type	Net cable,3G,WIFI(Sold separately)
Certificate	CE,ROHS,FCC,ISO9001,TUV

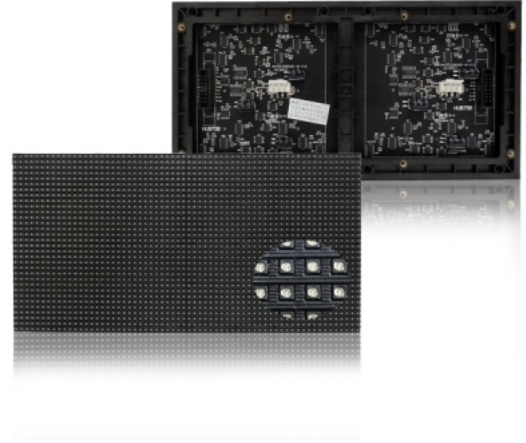

En Uygun Fiyatlar

- Sahne Ve Ekran İçin Optimum Tasarımlar
- En Kaliteli Malzeme,Moduller ve Çipler
- Resimlerinizde Her Detayı Sağlayın
- Yüksek Çözünürlük
- Çoklu Sinyal Girişi - Çeşitli Girişli Cihazları

Destekler



Su geçirmez
kauçuk conta



Modüller arası sinyal
ve elektrik bağlantısı



Patentli Mask Tasarımı



UV ışınlarına ve deformasyona
dayanıklı modül kit



En üst seviye
koruyucu kaplama



Modül içi
sinyal bağlantısı